
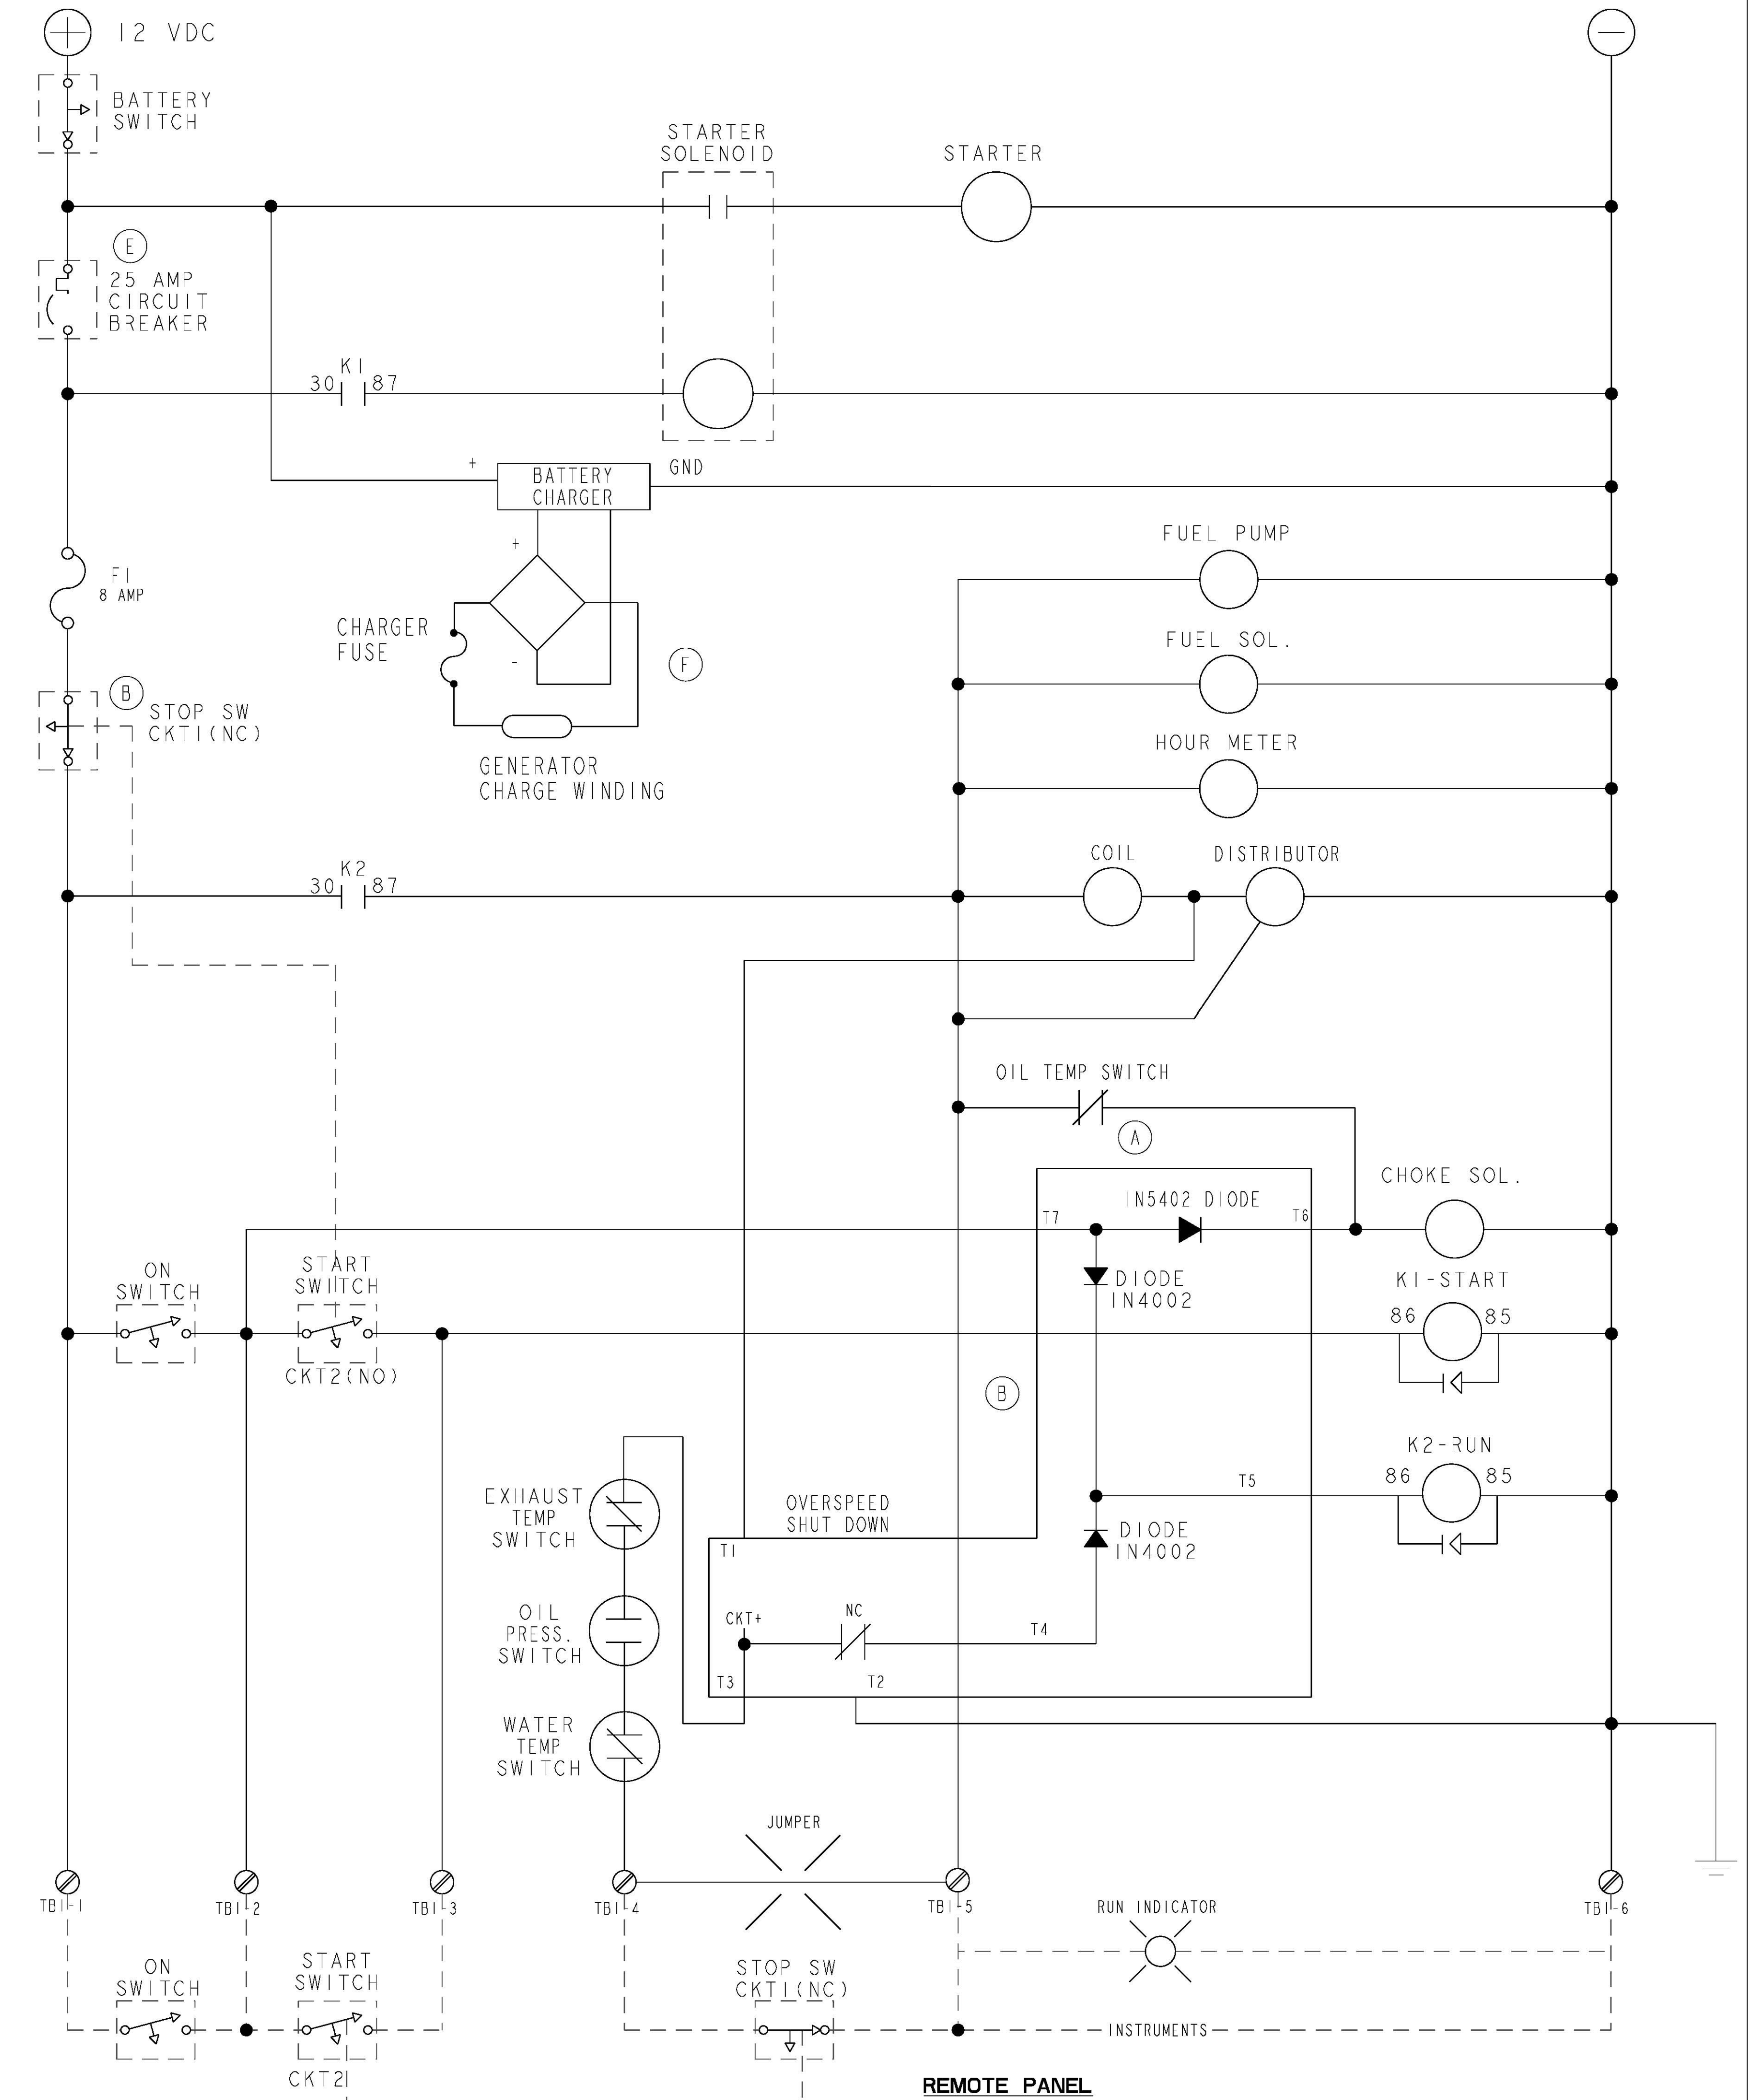


ECO NO.	DATE	REV.	REVISION RECORD	AUTH.	DR. BY
3527	11-26-97	A	ADDED OIL TEMP SWITCH AND DIODE		MB
3558	12-15-97	B	REVISED FOR NEW OVERSPEED		RM
3644	3/2-96	C	ADDED NOTE FOR RESISTOR R6		BRN
3663	3/17-98	D	REMOVED GROUND RELAY FROM K2 TERM. 85, ADDED GROUND WIRE. CHANGED WIRE COLOR FROM WHT/YEL TO WHT/RED.		BRN
3676	3/28-98	E	CHANGE CIRCUIT BREAKER FROM 20 TO 25 AMP		BRN
3862	10/1-98	F	RECONNECT BATTERY CHARGER (+) TO BATTERY (+) ON CIRCUIT BREAKER. ADDED FUSE TO BATTERY CHARGER WINDING.		AC

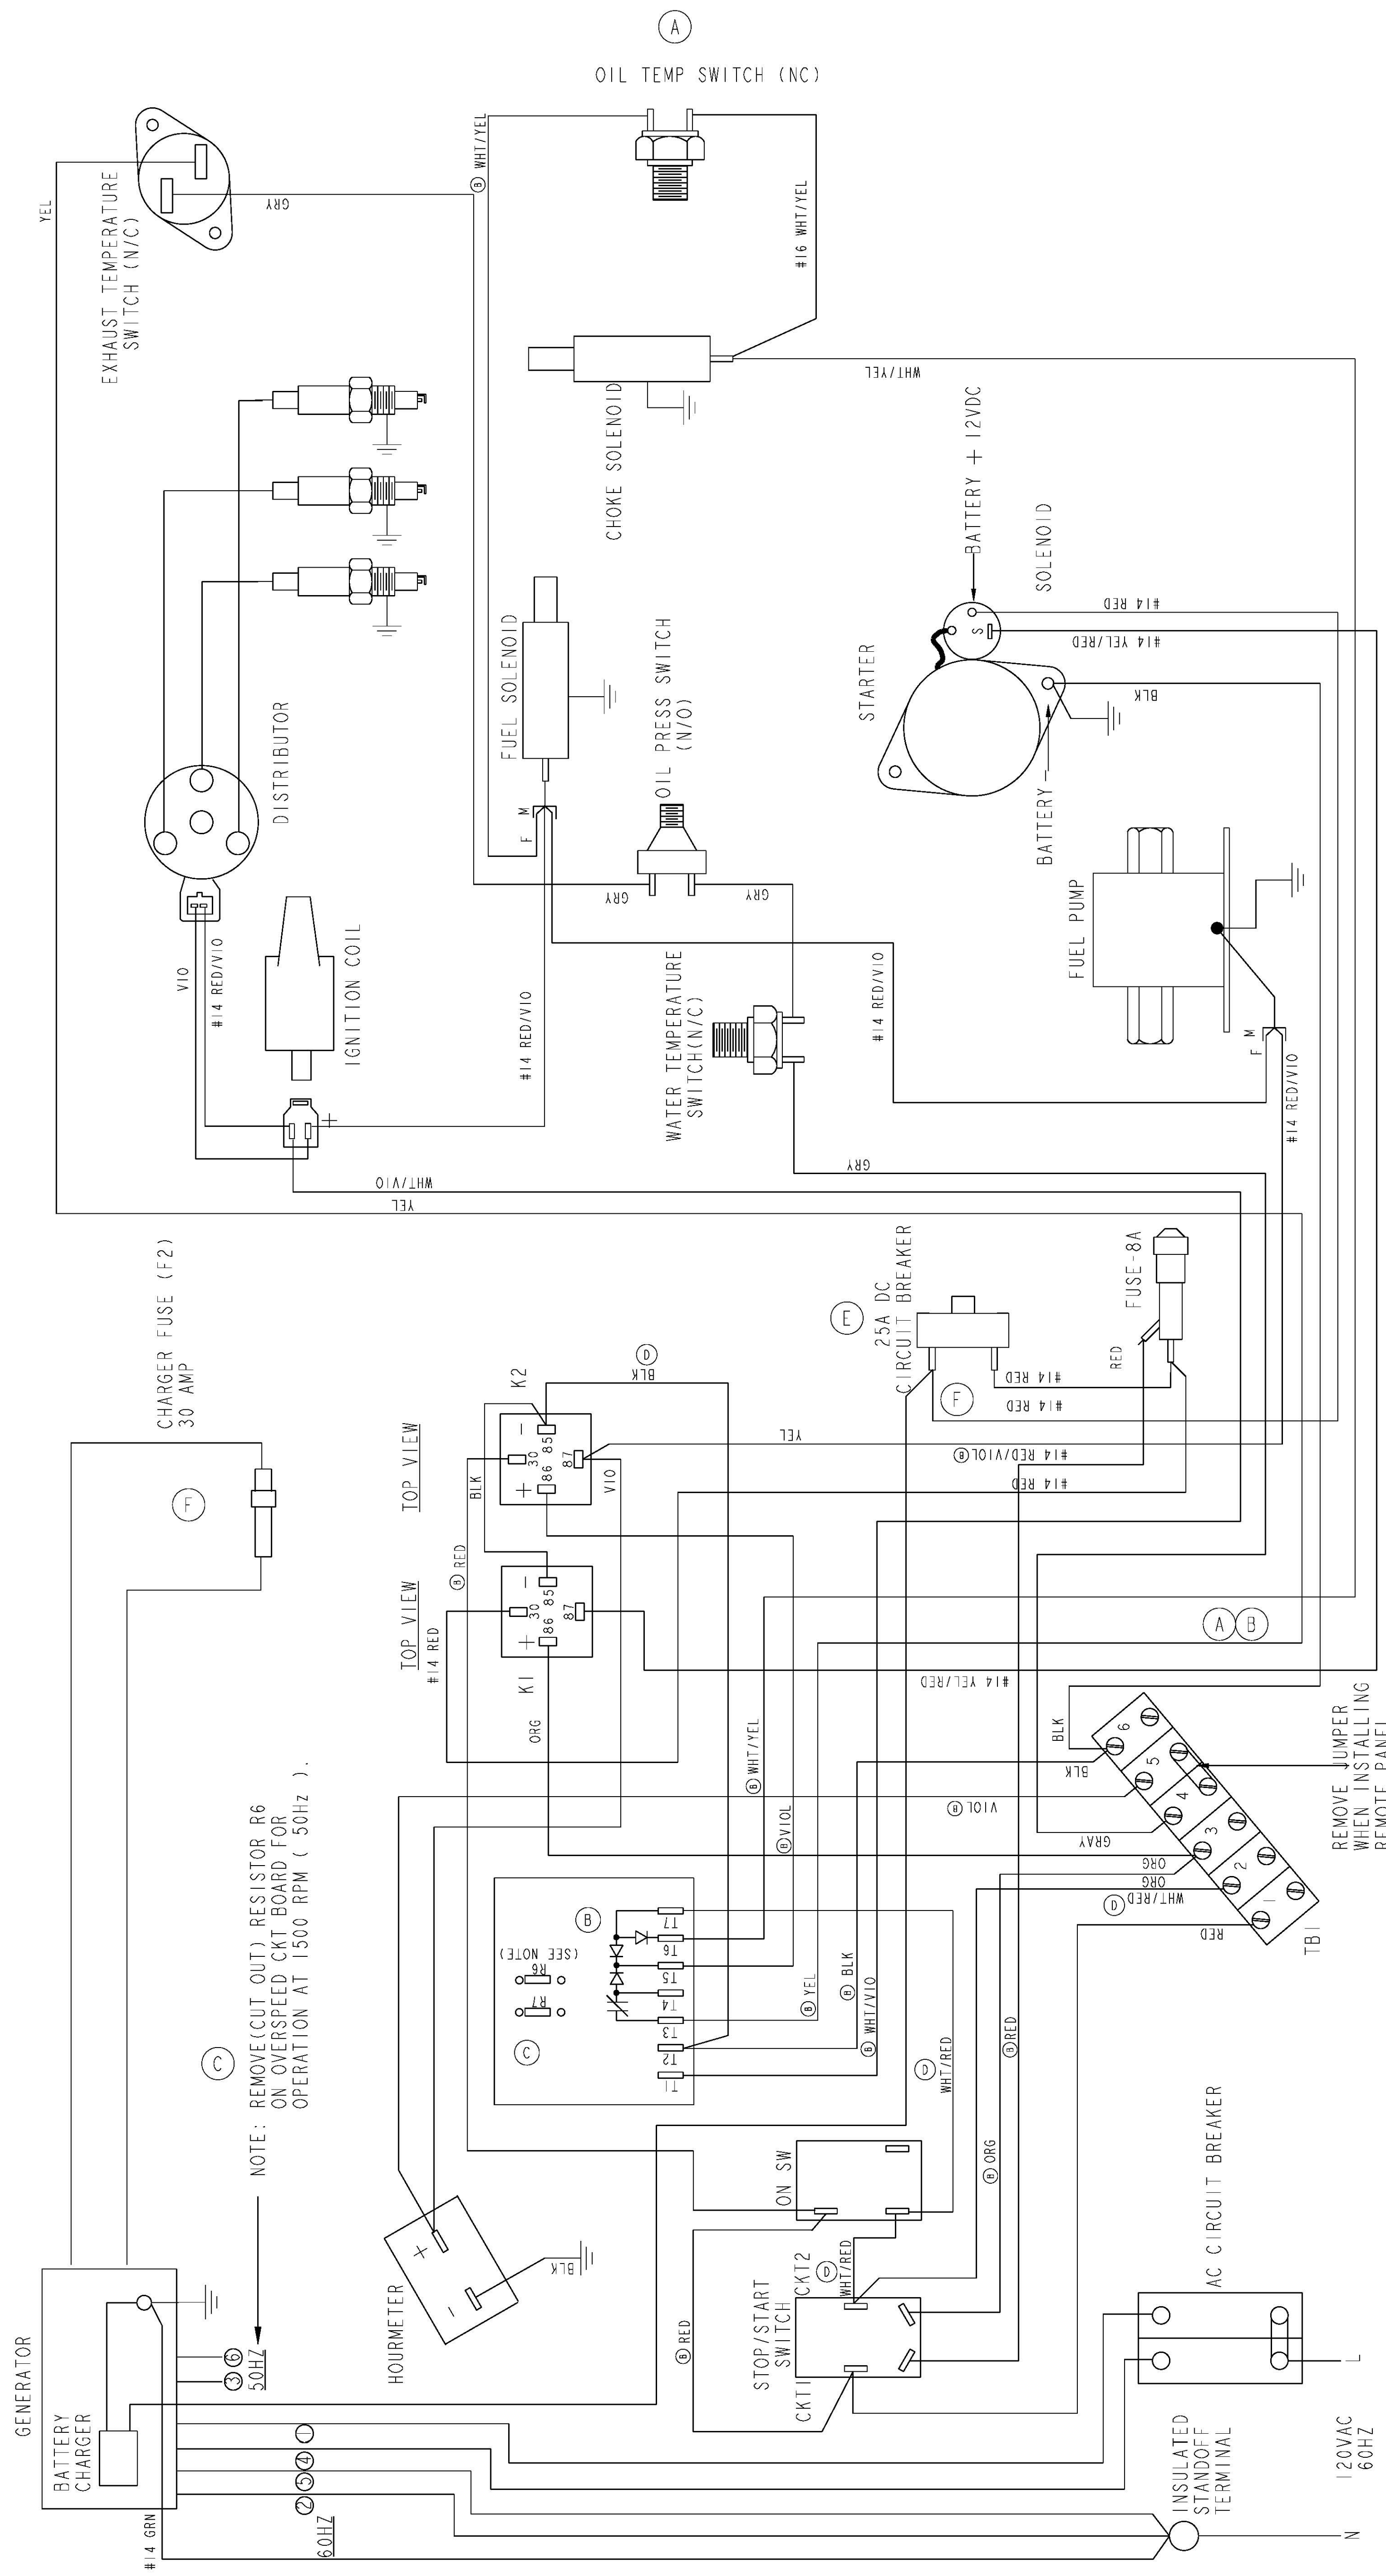

- NOTES:
- ALL WIRE #16AWG(105DEG C 600V-ALPHA# 1858/19-MIL-W-16878D TYPE B) UNLESS SPECIFIED OTHERWISE.
 - WARNING - RELAYS K1, K2 HAVE INTERNAL DIODES ACROSS THEIR COILS, POLARITY AS INDICATED MUST BE MAINTAINED TO AVOID DAMAGE TO THE RELAYS.

TOLERANCES (UNLESS OTHERWISE NOTED)		WESTERBEKE CORPORATION AVON MA. 02322	
INCHES	MILLIMETERS	TITLE	
.XX	.05	WIRING AND SCHEMATIC DIAGRAM:	
.XXX	.025	CARB-2 POLE	
CAST	.03	DRAWN BY	DATE
FINISH	.2	JIANG HUANG	AUGUST 20, 1997
DIMENSIONS		APPROVED BY	DATE
INCHES	MILLIMETERS		
(WHEN APPLICABLE)		SCALE	SIZE
		E	42834
		SHT. 1 of 1	REV. F